





FGAT615 Explorer Pod Installation Instructions

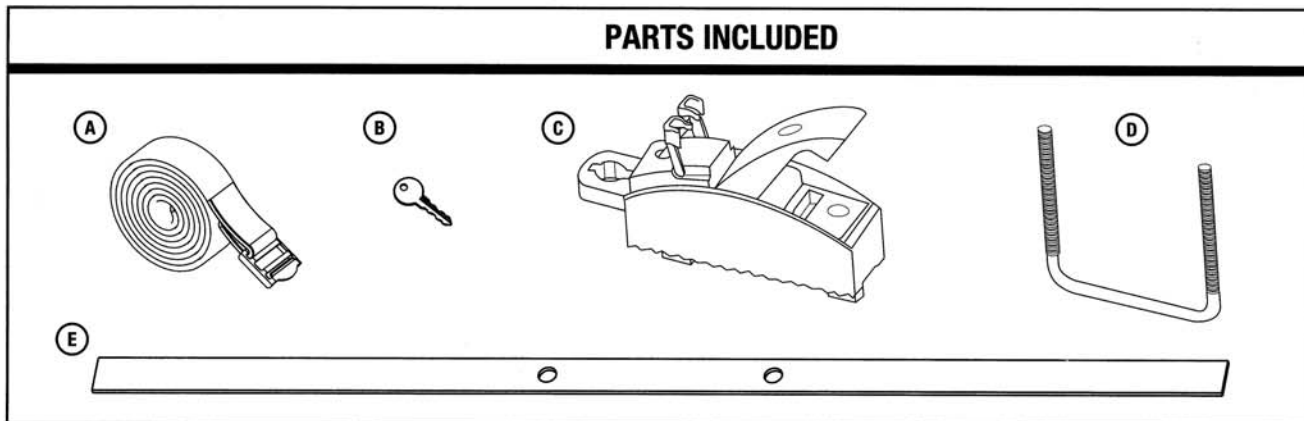


part	description	part number	qty.
A	Strap	10169	2
B	Key		2
C	Quick-Snap	14691	4
D	U-Bolt	43215	4
E	Slide Strip (pre-installed)	14011	4

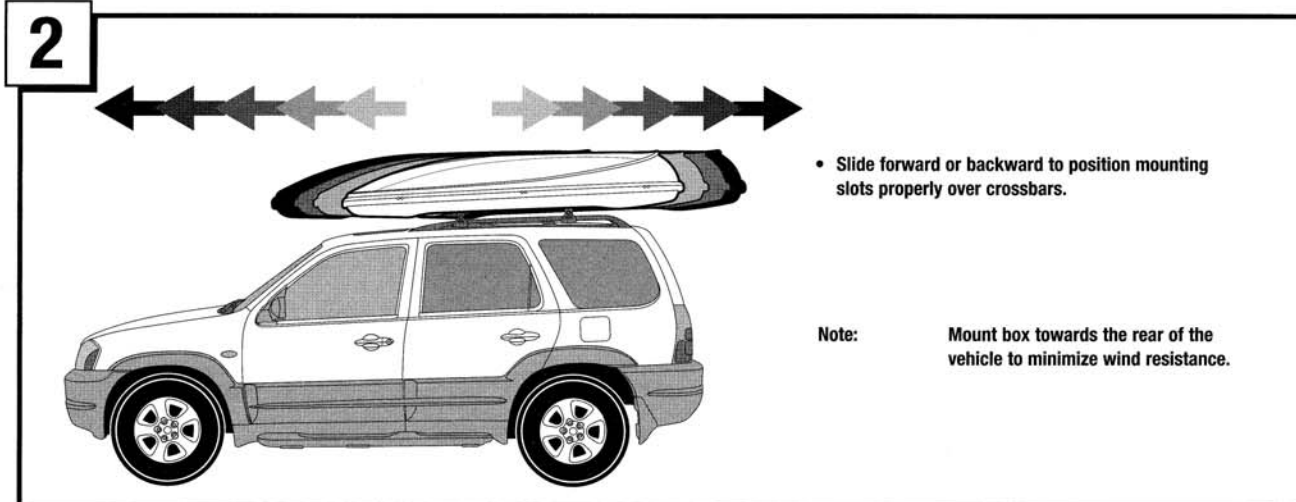

3

Minimum bar spread = 23 7/8" or 600mm.

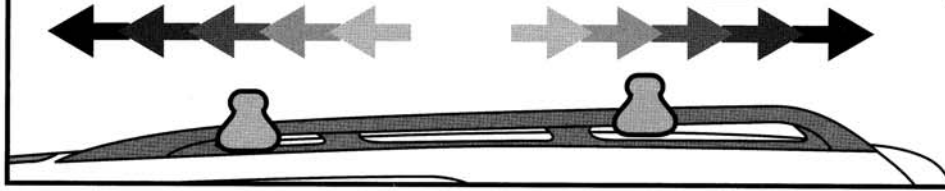


- If crossbars are adjustable, set to widest position which can be accommodated by mounting slots.

4




- Check rear hatch and front hood clearance.

5

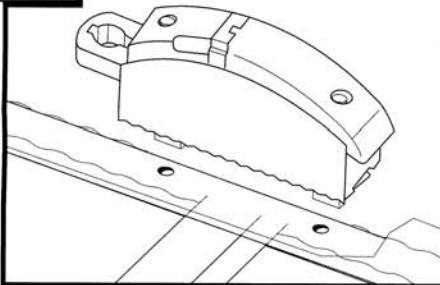

- Open box.
- Attach Quick-Snap into the holes in slide with grey lever toward the rear of the box.
- Position over load bars.



6

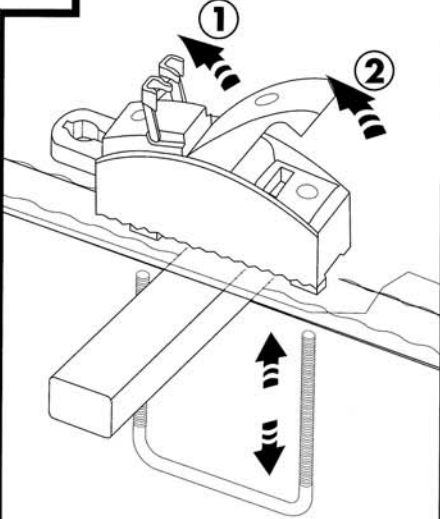

- Lift grey lever up after lifting red safety lock.
- Guide U-Bolt from under load bar into mounting holes.
- Press lever down and lower red safety lock.
- Reverse process for removing box.


Note: Quick-Snap does not remove once inserted through slide.

7

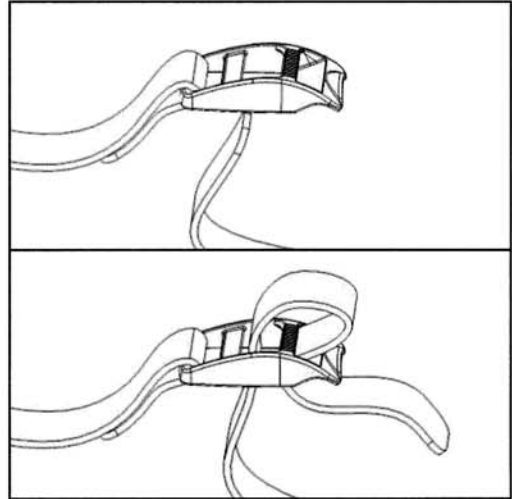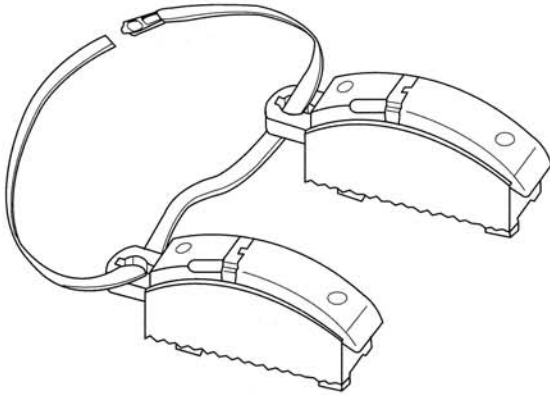

- Secure loads with supplied load straps.


8

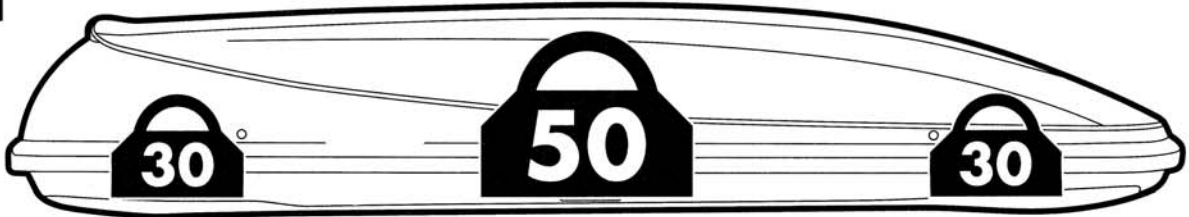

- Make sure that loads are evenly distributed inside the roof box. Do not exceed the maximum permitted load of 110 lbs./50kg. for the box or the maximum permitted load for the roof as recommended by the vehicle manufacturer, as well of the maximum load of the load carrier.

9

UNLOCKING/LOCKING THE BOX

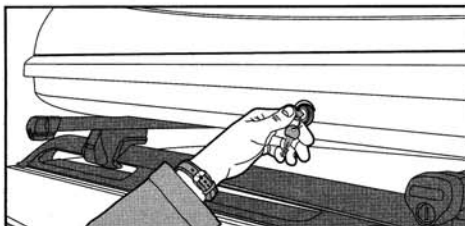


- Unlocking:** Insert the key and turn clockwise to the unlocked position. The key can only be removed when the box lid is closed and locked.
- Locking:** To close, press down on the lid at the front and rear of the box. Turn the key counter-clockwise to lock. Remove key.

10


EXCHANGING LOCK CORES

- In order to change the existing lock core to a different lock core number, follow steps 1–9 below.

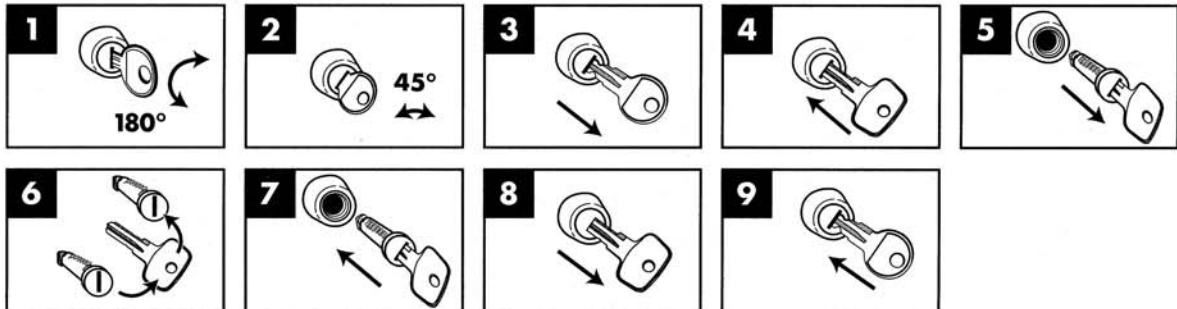

11

- This box is designed with a patented dual side opening system, allowing you to open the box from either side, providing easy access to each pair of quick connects during installation and removal.
- The box should only be opened one side at a time.
- The locks works the same way from either side of the box.

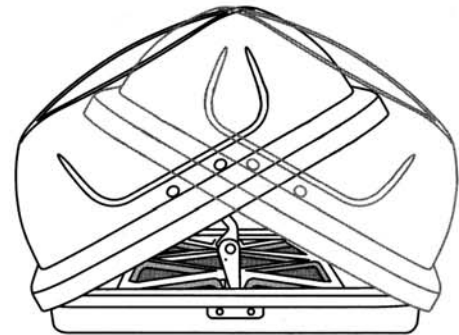

12

MAINTENANCE

- The roof box should be carefully cleaned and maintained, particularly in the winter months.
- For cleaning, use only water with a mild detergent which contains no additives (such as alcohol, chlorine or ammonia) as these could damage the surface of the roof box.
- The locks should be lubricated with graphite or similar dry lubricant.
- Box should be protected from exposure to the elements during prolonged periods of storage.
- Box and fittings should be inspected periodically for damage.

CARE & CLEANING OF BOXES WITH ACRYLIC CAPPED SURFACES**GENERAL CLEANING:**

- Clean with mild soap and lukewarm water.
- Use a soft damp cloth or chamois. Wipe surface gently.
- Dry by blotting with damp cloth or chamois.
- Recommended Cleaners:
 - Mr. Clean
 - Joy Detergent
 - Windex (ammonia or vinegar)
 - Fantastic - all purpose
 - 409 - all purpose

TO RESTORE ORIGINAL LUSTER:

- Recommended Spray Polish & Waxes:
 - Simonize Professional "One Step Instant Polish"
 - Turtle Wax Platinum Series "Ultra Gloss Detailer"
 - Meguiar's "NXT Generation Spray Wax"
- Use as instructed by the manufacturer.

TO REMOVE MINOR SCRATCHES:

- Recommended scratch removers:
 - Novus plastic polish
 - No. 2 - Fine scratch remover
- Use as instructed by the manufacturer.

AVOID: wiping with cloths that may contain grit or abrasives.

AVOID: using powdered cleaners.

AVOID: using cleaning solutions, polishes or waxes which contain petroleum distillates or strong solvents.

NOTE: Any product not recommended should be tested on a small inconspicuous area first. Wash off immediately if surface starts to soften or degrade in any manner.

RACK GUIDELINES

When using carriers and accessories, the user must understand the precautions. The points listed below will assist you in using the rack system and will encourage safety.

- Check the manufactures' guidelines for any restrictions about using car top boxes on your load carrier.
- Do not carry more than 50 kg (110 lbs.) in the box. Loads that exceed this limit are not covered by the warranty.
- Do not exceed the weight limit of your roof rack. Total load = cargo weight plus luggage box used to carry cargo (FGAT615-1 Explorer pod- 40 lbs).
- Make sure all knobs, bolts and locks are firmly attached, tightened and locked before every trip. Knobs, bolts and locks must be periodically inspected for signs of wear, corrosion and fatigue. Check your load at stops during the trip to ensure continued fastening security.
- Be aware of the width and height of your cargo since low clearance branches, bridges, and parking garages can damage the load. All cargo will affect the vehicle's driving behavior. Never drive with any lock, knob, or rack in an open, unlocked or loose condition.
- Remove your box when not in use and before entering automatic car washes.
- All locks must be turned and moved periodically to ensure smooth operation. Use graphite or similar dry lubricant to help this. The locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended for an extended period. Place at least one key in the glove compartment. Replacement keys are available at www.prorac.com.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use load carriers and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity. Failure to follow these guidelines or the product's instructions will void the warranty.
- Consult with your dealer if you have any questions regarding the operations and limits of these products. Review all instructions and warranty information carefully.

Made in U.S.A.